




**ALUMINUM ELECTROLYTIC CAPACITORS
MINIATURE SIZE SERIES**

FEATURES

- THE SREA SERIES IS DESIGNED FOR SUITABLE USE IN SLIM TYPE AUDIO EQUIPMENT AS VTR, CAR-RADIO AND CAR STEREO. THEIR SMALL SIZE AND LIGHTWEIGHT IS OPTIMUM FOR AUTOMATIC INSERTION.




SPECIFICATIONS

Items	Performance																
Operating Temperature Range	6.3~400V	450V															
	-40°C~+85°C	-25°C~+85°C															
Capacitance Tolerance	±20% (at 120Hz, 20°C)																
Leakage Current (at 20 °C)	Rated Voltage	≤100V	>100V														
	Time	after 2 minutes	after 5 minutes														
	Leakage Current	I=0.01CV or 3(μA) whichever is greater	CV≤1000 I=0.03CV+15(μA)	CV>1000 I=0.02CV+25(μA)													
		Where, C=rated capacitance in μF. V=rated DC working voltage in V.															
Dissipation Factor (Tan δ at 120 Hz, 20 °C)	Rated Voltage	6.3 10 16 25 35 50 63 100 160 200 250 350 400 450															
	Tan δ (max)	0.23 0.20 0.16 0.14 0.12 0.10 0.09 0.08 0.12 0.14 0.17 0.20 0.25 0.25															
		When the capacitance exceeds 1000μF, 0.02 shall be added every 1000 μF increase.															
Low Temperature Characteristics (at 120 Hz)	Impedance ratio shall not exceed the values given in the table below.																
	Rated Voltage		6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	
	Impedance Ratio	Z(-25°C)	∅D<16	6	4	3	3	2	2	2	2	3	6	8	12	14	16
		Z(+20°C)	∅D≥16	8	6	4	4	3	3	3	3						
	Z(-40°C)	∅D<16	10	8	6	6	4	3	3	3	4	8	10	-	-	-	
	Z(+20°C)	∅D≥16	18	16	12	10	8	8	6	6							
Load Life Test	Test Time	2000hrs (3000hrs for ∅ D ≥ 10mm)															
	Capacitance Change	≤ ± 20%															
	Dissipation Factor	Less than 200% of specified value															
	Leakage Current	Within specified value															
		*The above specifications shall be satisfied when the capacitors are restored to 20 °C after the rated voltage applied for 2000/3000 hrs at 85°C.															
Shelf Life Test	Test Time	1000 hrs															
	Capacitance Change	≤ ± 20%															
	Dissipation Factor	Less than 200% of specified value															
	Leakage Current	Within specified value															
		*The above specifications shall be satisfied when the capacitors are restored to 20 °C after exposing them for 1000 hrs at 85 °C without voltage applied.															
Ripple Current & Frequency Multipliers	Freq. (Hz)		60	120	500	1K	10K										
	Cap. (μF)	Under 100	0.70	1.00	1.30	1.40	1.50										
		100 to 1000	0.75	1.00	1.20	1.30	1.35										
		1000 up above	0.80	1.00	1.10	1.12	1.15										
Ripple Current & Temperature Multipliers	Temperature(°C)	Under 50	70	85													
	Multiplier	1.78	1.40	1.00													
Standards	Satisfies Characteristic W of JIS C 5141																



DIAGRAM OF DIMENSIONS

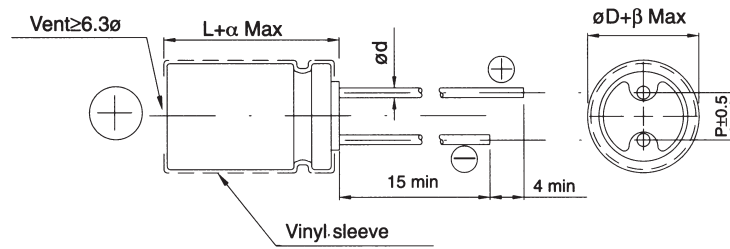

Unit: mm

LEAD SPACING AND DIAMETER

φ	5	6.3	8	10	13	16	18	22	25
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10	12.5
φ d	0.5		0.6		0.8		1.0		
α	1.0				1.5				
β	0.5								

DIMENSION & PERMISSIBLE RIPPLE CURRENT

Dimension: φ D x L (mm)
Ripple Current: mA/rms at 120 Hz, 85 °C

μF	code	6.3V(0J)			10V(1A)			16V(1C)			25V(1E)						
		φ D X L	mA * φ D X L	mA	φ D X L	mA * φ D X L	mA	φ D X L	mA * φ D X L	mA	φ D X L	mA * φ D X L	mA				
4.7	4R7										5 x 11	31					
10	100							5 x 11	49		5 x 11	54					
22	220				5 x 11	70		5 x 11	75		5 x 11	80					
33	330	5 x 11	72		5 x 11	84		5 x 11	90		5 x 11	97					
47	470	5 x 11	90		5 x 11	100		5 x 11	110		5 x 11	115					
100	101	5 x 11	130		5 x 11	145		6.3 x 11	180	5 x 11	160	6.3 x 11	190				
220	221	6.3 x 11	230	5 x 11	200	6.3 x 11	250		8 x 11.5	300	6.3 x 11	260	8 x 11.5	320			
330	331	8 x 11.5	290	6.3 x 11	270	8 x 11.5	350	6.3 x 11	290	8 x 11.5	370		10 x 12.5	470	8 x 11.5	440	
470	471	8 x 11.5	380	6.3 x 11	320	8 x 11.5	415	6.3 x 11	350	10 x 12.5	520	8 x 11.5	440	10 x 16	620	10 x 12.5	545
1000	102	8 x 11.5	540			10 x 12.5	650			10 x 16	785			13 x 20	1090	10 x 20	955
2200	222	10 x 20	1000			13 x 20	1240	10 x 20	1070	13 x 20	1295			16 x 25	1660	13 x 25	1540
3300	332	13 x 20	1380	10 x 20	1185	13 x 20	1420			16 x 25	1840	13 x 25	1655	16 x 31.5	2070	16 x 25	1975
4700	472	16 x 25	1880	13 x 20	1545	16 x 25	1980	13 x 25	1780	16 x 31.5	2260	16 x 25	2090	18 x 35.5	2520	16 x 31.5	2420
6800	682	16 x 25	2120			16 x 25	2220			16 x 31.5	2520			18 x 35.5	2880		
10000	103	16 x 31.5	2500	16 x 25	2330	18 x 40	3010	16 x 35.5	2670	22 x 40	3440	18 x 35.5	2920	25 x 40	3700		
22000	223	22 x 40	3700	18 x 40	3320												

μF	code	35V(1V)			50V(1H)			63V(1J)			100V(2A)						
		φ D X L	mA * φ D X L	mA	φ D X L	mA * φ D X L	mA	φ D X L	mA * φ D X L	mA	φ D X L	mA * φ D X L	mA				
0.1	0R1				5 x 11	1.5				5 x 11	3			5 x 11	3		
0.22	R22				5 x 11	3.5				5 x 11	4.5			5 x 11	5.8		
0.33	R33				5 x 11	5				5 x 11	7.5			5 x 11	8.8		
0.47	R47				5 x 11	7				5 x 11	9.5			5 x 11	12		
1	010				5 x 11	15				5 x 11	17			5 x 11	22		
2.2	2R2				5 x 11	29				5 x 11	28			5 x 11	33		
3.3	3R3				5 x 11	35				5 x 11	34			5 x 11	40		
4.7	4R7	5 x 11	40		5 x 11	42				5 x 11	45			5 x 11	48		
10	100	5 x 11	58		5 x 11	65				5 x 11	70			6.3 x 11	80		
22	220	5 x 11	87		5 x 11	95				6.3 x 11	115			8 x 11.5	135	6.3 x 11	115
33	330	6.3 x 11	115	5 x 11	108	6.3 x 11	136	5 x 11	125	8 x 11.5	150	6.3 x 11	140	10 x 16	195	8 x 11.5	145
47	470	6.3 x 11	145	5 x 11	130	6.3 x 11	165			8 x 11.5	190	6.3 x 11	170	10 x 16	255	10 x 12.5	235
100	101	8 x 11.5	240	6.3 x 11	210	8 x 11.5	260			10 x 12.5	320			10 x 20	370		
220	221	10 x 12.5	420	8 x 11.5	385	10 x 16	490	10 x 12.5	455	10 x 20	565	10 x 16	490	13 x 25	675	13 x 20	640
330	331	10 x 16	570	10 x 12.5	490	13 x 20	635	10 x 16	585	13 x 20	765	10 x 20	710	16 x 31.5	972	13 x 25	825
470	471	10 x 16	740			13 x 20	860	10 x 20	755	16 x 25	1050	13 x 20	900	18 x 35.5	1135	16 x 25	1070
1000	102	13 x 20	1145			16 x 25	1530	13 x 25	1340	16 x 31.5	1700	16 x 25	1560	22 x 40	2600	18 x 40	2410
2200	222	16 x 31.5	1890	16 x 25	1785	18 x 40	2231	16 x 35.5	2075	22 x 40	2100						
3300	332	18 x 35.5	2340	16 x 35.5	2275	22 x 40	2785	18 x 35.5	2500	25 x 50	2560						
4700	472	22 x 40	3040	18 x 35.5	2700	25 x 40	3300	22 x 40	3155	25 x 50	3510						

Case size in mark of "*" is smaller.



DIMENSION & PERMISSIBLE RIPPLE CURRENT

Dimension: \varnothing D x L(mm)
Ripple Current: mA/rms at 120 Hz, 85 °C

μ F	V.DC code	160V(2C)				200V(2D)				250V(2E)			
		\varnothing D X L	mA	* \varnothing D X L	mA	\varnothing D X L	mA	* \varnothing D X L	mA	\varnothing D X L	mA	* \varnothing D X L	mA
0.47	R47	6.3 x 11	15			6.3 x 11	16			8 x 11.5	21		
1	010	6.3 x 11	24			6.3 x 11	25			8 x 11.5	32		
2.2	2R2	6.3 x 11	34			8 x 11.5	44			8 x 11.5	49	6.3 x 11	42
3.3	3R3	8 x 11.5	50	6.3 x 11	43	8 x 11.5	54	6.3 x 11	46	10 x 12.5	70	8 x 11.5	60
4.7	4R7	8 x 11.5	60	6.3 x 11	51	10 x 12.5	76	8 x 11.5	64	10 x 16	93	8 x 11.5	72
10	100	10 x 16	115	10 x 12.5	104	10 x 20	138	10 x 12.5	112	10 x 20	150	10 x 16	138
22	220	13 x 20	216	10 x 20	189	13 x 20	234	10 x 20	204	13 x 25	282	13 x 20	258
33	330	13 x 20	270	10 x 20	228	13 x 25	318	13 x 20	288	13 x 25	348		
47	470	13 x 25	354	13 x 20	318	16 x 25	426	13 x 25	378	16 x 25	468	13 x 25	420
100	101	16 x 25	582			16 x 35.5	678	16 x 25	582	18 x 40	822	16 x 35.5	732
220	221	18 x 35.5	900	16 x 31.5	792	18 x 40	1062	18 x 35.5	1002	22 x 40	1134		
330	331	22 x 40	1158	18 x 35.5	984								

μ F	V.DC code	350V(2V)				400V(2G)				450V(2W)			
		\varnothing D X L	mA	* \varnothing D X L	mA	\varnothing D X L	mA	* \varnothing D X L	mA	\varnothing D X L	mA	* \varnothing D X L	mA
0.47	R47	8 x 11.5	21	6.3 x 11	18	10 x 12.5	26	8 x 11.5	21	10 x 12.5	26	8 x 11.5	21
1	010	8 x 11.5	32	6.3 x 11	27	10 x 12.5	38	8 x 11.5	32	10 x 12.5	38	8 x 11.5	32
2.2	2R2	10 x 16	63	8 x 11.5	49	10 x 16	63	10 x 12.5	57	10 x 16	63	10 x 12.5	57
3.3	3R3	10 x 16	78	10 x 12.5	70	10 x 20	86	10 x 16	78	10 x 20	86	10 x 16	78
4.7	4R7	10 x 20	103	10 x 16	93	13 x 20	120	10 x 20	103	13 x 20	120	10 x 20	103
10	100	13 x 20	174	10 x 20	150	13 x 25	192	13 x 20	174	13 x 25	192	13 x 20	174
22	220	13 x 25	282			16 x 25	318			16 x 25	354		
33	330	16 x 31.5	438	16 x 25	390	16 x 35.5	426	16 x 31.5	378	18 x 35.5	426	16 x 31.5	378
47	470	18 x 35.5	534	16 x 31.5	474	18 x 40	624	16 x 35.5	414	22 x 40	624	16 x 35.5	414
100	101	22 x 40	762			25 x 50	846			25 x 50	846		

Case size in mark of "*" is smaller.

*Low-Profile Size

μ F	V.DC code	6.3V(OJ)		10V(1A)		16V(1C)		25V(1E)		35V(1V)		50V(1H)	
		\varnothing D X L	mA	* \varnothing D X L	mA	\varnothing D X L	mA	* \varnothing D X L	mA	\varnothing D X L	mA	* \varnothing D X L	mA
470	471											16 x 16	745
1000	102							13 x 16	830	16 x 16	1010	16 x 20	1160
2200	222			13 x 16	970	16 x 16	1160	16 x 20	1360	18 x 20	1560		
3300	332			16 x 16	1310	16 x 20	1460	18 x 20	1720	18 x 25	1970		
4700	472	16 x 16	1410	16 x 20	1560	18 x 20	1770	18 x 25	2070				
6800	682	16 x 20	1660	18 x 20	1870	18 x 25	2170						
10000	103	18 x 20	2020	18 x 25	2370								

μ F	V.DC code	160V(2C)		200V(2D)		250V(2E)	
		\varnothing D X L	mA	* \varnothing D X L	mA	\varnothing D X L	mA
22	220					13 x 16	280
33	330			16 x 16	350	16 x 16	350
47	470	16 x 16	420	16 x 20	420	16 x 20	420
68	680	16 x 20	490	18 x 20	490	18 x 20	490
100	101	18 x 20	590	18 x 25	590		
150	151	18 x 25	710				