SURGE
Components Inc.
1016 Grand Boulevard
Deer Park, NY 11729 • 516 631-1818 • FAX: 631 595-1283

TAPING SPECIFICATION FOR AXIAL LEAD TYPE

TAPING SPECIFICATION
FIGURE 7

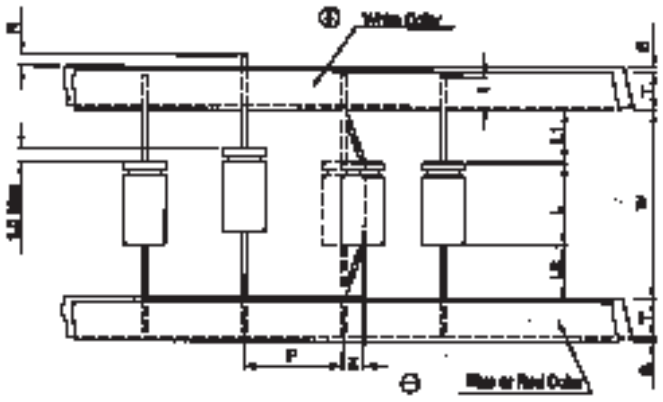

Notes:
This specification conforms with EIA standard RS-296-D
1. Taping
   1-1 Case diameters 5mm to 10mm can be supplied taped & reeled.
   1-2 Unless otherwise specified, the cathode tape shall be coloured and the anode tape shall be white.
   1-3 A minimum 300 mm leader tape shall be provided before the first and after the last capacitor on the reel.
   1-4 Dimensions are show in Fig. 7.
2. Packing
   2-1 Taped capacitors shall be wound on a reel shown in Fig. 8.
   2-2 Kraft paper shall be wound between layers of capacitors for capacitor protection.
   2-3 After winding the taped capacitors on the reel, a single sided corrugated cardboard strip shall be wound over the capacitors (on wrap).

Unit: mm

D ø	W±1.5		P	L1-L2	Z	R	T	t	S
	L≤16	L>16	±0.5		Max	Max	±1.0	Min	Max
5	52	-	10	±1.5	1.2	2	6.0	3.2	0.8
6.3	52	63	10	±1.5	1.2	2	6.0	3.2	0.8
8	63	73	10	±1.5	1.2	2	6.0	3.2	0.8
10	63	73	15	±1.5	1.2	2	6.0	3.2	0.8

Packaging
Figure 8 Reel Pack Box

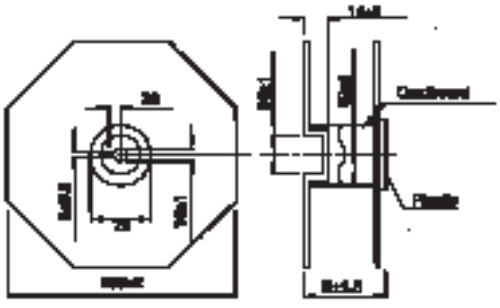

Figure 9 Packing Box



Quantity of packaging

øD	5	6.3	8	10
Q'ty	1200	1000	750	300

Box dimension Unit: mm

W	52	63	73	83
B	70	82	92	102
A	85	97	107	117