


Feature


- 105°C, 1,000 ~ 2,000 hours assured
- High temperature operating range, with 7mm height
- RoHS Compliance

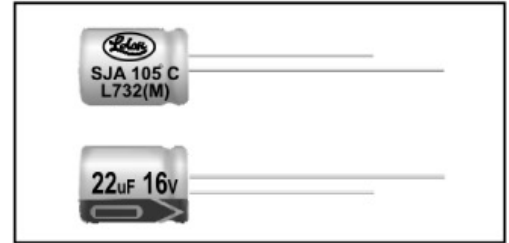

SECIFICATIONS

Items	Performance																														
	SJ	SJA																													
Life	1,000 hrs	2,000 hrs																													
Operating Temperature Range	-55°C ~ +105°C																														
Capacitance Tolerance	±20% (at 120Hz, 20°C)																														
Leakage Current (at 20°C)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF V = rated DC working voltage in V																														
Dissipation Factor (Tan δ at 120Hz, 20°C)	<table border="1"> <tr> <td>Rated Voltage</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> </tr> <tr> <td>Tan δ (max)</td> <td>0.35</td> <td>0.23</td> <td>0.20</td> <td>0.17</td> <td>0.15</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> </tr> </table>		Rated Voltage	4	6.3	10	16	25	35	50	63	Tan δ (max)	0.35	0.23	0.20	0.17	0.15	0.12	0.10	0.10											
Rated Voltage	4	6.3	10	16	25	35	50	63																							
Tan δ (max)	0.35	0.23	0.20	0.17	0.15	0.12	0.10	0.10																							
Low Temperature Characteristics (at 120Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <td colspan="2">Rated Voltage</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> </tr> <tr> <td rowspan="2">Impedance Ratio</td> <td>Z(-25°C)/Z(+20°C)</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-55°C)/Z(+20°C)</td> <td>12</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>4</td> <td>3</td> </tr> </table>		Rated Voltage		4	6.3	10	16	25	35	50	63	Impedance Ratio	Z(-25°C)/Z(+20°C)	6	4	3	3	2	2	2	2	Z(-55°C)/Z(+20°C)	12	10	8	6	4	4	4	3
Rated Voltage		4	6.3	10	16	25	35	50	63																						
Impedance Ratio	Z(-25°C)/Z(+20°C)	6	4	3	3	2	2	2	2																						
	Z(-55°C)/Z(+20°C)	12	10	8	6	4	4	4	3																						
Load Life Test	<table border="1"> <tr> <td>Test Time</td> <td>1,000 / 2,000 hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±25% of initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 1,000 / 2,000 hrs at 105°C.</p>		Test Time	1,000 / 2,000 hrs	Capacitance Change	Within ±25% of initial value	Dissipation Factor	Less than 200% of specified value	Leakage Current	Within specified value																					
Test Time	1,000 / 2,000 hrs																														
Capacitance Change	Within ±25% of initial value																														
Dissipation Factor	Less than 200% of specified value																														
Leakage Current	Within specified value																														
Shelf Life Test	Test time: 1,000 hrs; other items are the same as those for the load life test.																														
Ripple Current & Frequency Multipliers	<table border="1"> <tr> <td rowspan="3">Cap.(μF)</td> <td>Freq.(Hz)</td> <td>60 (50)</td> <td>120</td> <td>500</td> <td>1K</td> <td>10K up</td> </tr> <tr> <td>Under 47</td> <td>0.75</td> <td>1.00</td> <td>1.20</td> <td>1.30</td> <td>1.45</td> </tr> <tr> <td>100 to 470</td> <td>0.88</td> <td>1.00</td> <td>1.10</td> <td>1.15</td> <td>1.20</td> </tr> </table>		Cap.(μF)	Freq.(Hz)	60 (50)	120	500	1K	10K up	Under 47	0.75	1.00	1.20	1.30	1.45	100 to 470	0.88	1.00	1.10	1.15	1.20										
Cap.(μF)	Freq.(Hz)	60 (50)		120	500	1K	10K up																								
	Under 47	0.75		1.00	1.20	1.30	1.45																								
	100 to 470	0.88	1.00	1.10	1.15	1.20																									

DIAGRAM OF DIMENSIONS

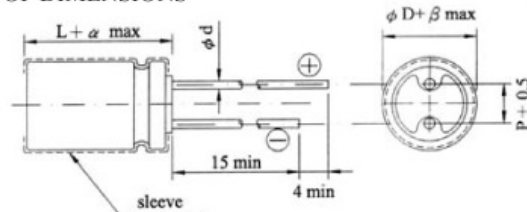

LEAD SPACING AND DIAMETER Unit: mm

φ D	4	5	6.3	8
P	1.5	2.0	2.5	3.5
φ d	0.45	0.5		
α	1.0			
β	0.5			

Dimension: φ D×L(mm)

Ripple Current: mA/rms at 120 Hz, 105°C

DIMENSION & PERMISSIBLE RIPPLE CURRENT

μF	V.DC Contents	4V (0G)		6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)		63V (1J)	
		φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA	φ D×L	mA
0.1	0R1													4×7	2	4×7	2
0.22	R22													4×7	3	4×7	3
0.33	R33													4×7	4	4×7	4.4
0.47	R47													4×7	5	4×7	7.9
1	010													4×7	10	4×7	11
2.2	2R2													4×7	15	4×7	17
3.3	3R3													4×7	18	4×7	21
4.7	4R7											4×7	22	5×7	23	5×7	26
10	100							4×7	25	4×7	26	5×7	30	6.3×7	34	6.3×7	40
22	220			4×7	31	4×7	32	5×7*	39	5×7	41	6.3×7	47	6.3×7	53	8×7	70
33	330	4×7	32	4×7	32	4×7	35	5×7	43	6.3×7	53	8×7	71	8×7	76		
47	470	4×7	38	4×7	38	5×7	47	6.3×7	59	6.3×7	65	8×7	83	8×7	85		
100	101	5×7	61	6.3×7	75	6.3×7	80	6.3×7	90	8×7	125						
220	221	6.3×7	90	6.3×7	99	8×7	140	8×7	146								
330	331	8×7	156	8×7	156	8×7	160										
470	471	8×7	180	8×7	180												